

Lamp Type: G36T5LCA/PT-36"/2W/B


Spec Number:

1279

Engineering Specification Sheet


**Lamp Diagram:**

Pigtail Lamp/2W

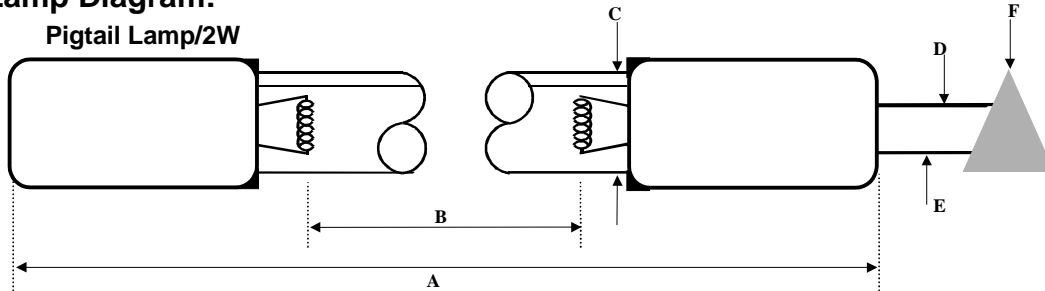


**A08-62-C00 HD No Hole Base**

**Left Base Diagram:**

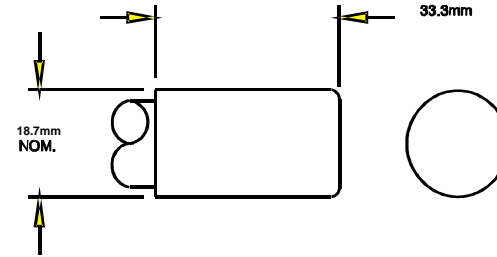

**A08-73-C00 Mini BiPin w/o Pins Base**

**Right Base Diagram:**

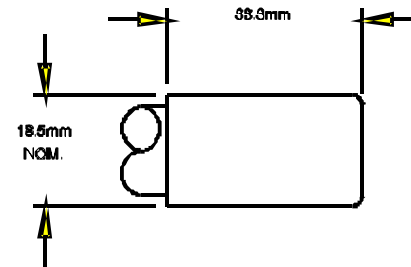

**Lamp Characteristics**

(A) Base Face: 843 mm  
 (B) ARC: 767mm  
 (C) Bulb Diameter: 15  
 (X) \_\_\_\_\_  
 Glass Type: L (Non Ozone) Coating: A11-QC-001  
**If Spliced:** L \_\_\_\_\_ mm VH \_\_\_\_\_ mm  
 (Y) \_\_\_\_\_

Operating Current: 420ma  
 Lamp Voltage: 120v  
 Lamp Wattage: 40w



**UV Output**

Output UVC Watts	Output $\mu$ /cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
15	150	12000	80.00%		SM-140-TP

**First Light**  
 PO Box 191, 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
 \*\*\*UV Output is measured at 254 nm\*\*\*  
 \*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/16/2011  
 11:54:40 AM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.