


Lamp Type: G36T5LCA/2C
R-Can S8RL

Spec Number:
1495

Engineering Specification Sheet


Lamp Diagram:

Two Pin Lamp

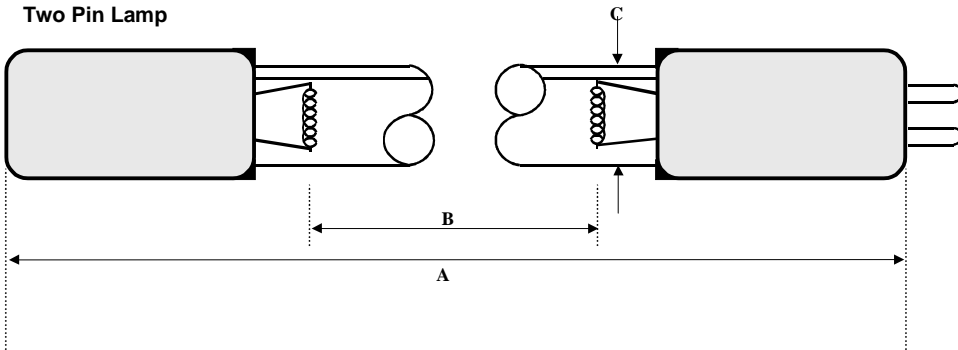


A08-62-C00 HD No Hole Base

Left Base Diagram:

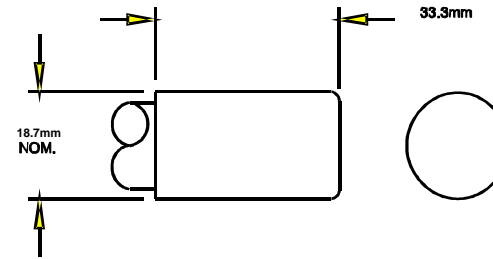

Right Base Diagram:

A08-15-CP0 Two Pin Base

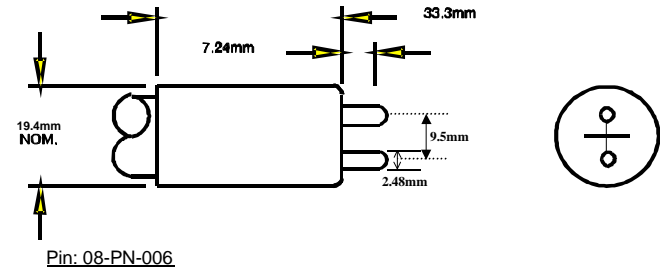

Lamp Characteristics

(A) Base Face: 843 mm
 (B) ARC: 767mm
 (C) Bulb Diameter: 15
 (X) _____
 Glass Type: L (Non-Ozone) Coating: A11-QC-001
 Operating Current: 420mA
 Lamp Voltage: 120V
 Lamp Wattage: 40W
 If Spliced: L _____ mm VH _____ mm
 (Y) _____



UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
16	150	12000	80.00%		SM-140-TP

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/21/2011
1:35:06 PM