

Lamp Type: GSL1554T5VHCA/CB-0M9


Spec Number:

1604

Engineering Specification Sheet


Lamp Diagram:

Barrier Base Lamp Single Ended

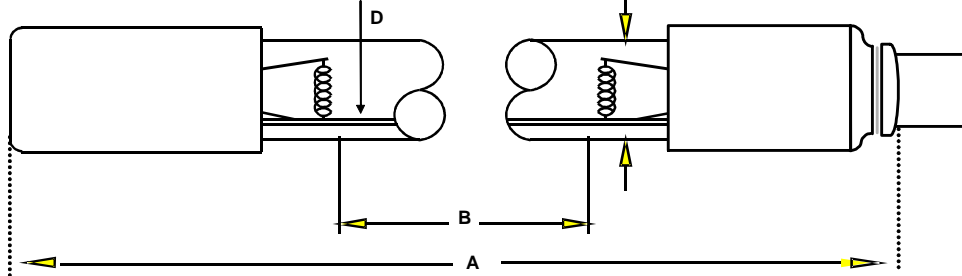


A08-62-C00 HD No Hole Base

Left Base Diagram:

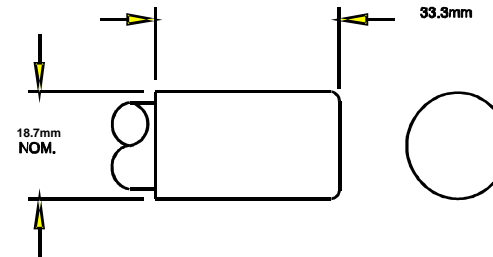

Right Base Diagram:

A08-M9-CP0 Aftermarket Photoscience Base

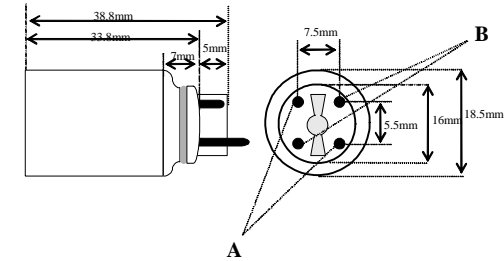

A: 08-PN-006 (Short)
B: 08-PN-010 (Long)

Lamp Characteristics

(A) Base Face:	1554	mm		
(B) ARC:	1478	mm	Operating Current	450mA
(C) Bulb Diameter:	15	mm	Lamp Voltage:	170V
(X)			Lamp Wattage:	75W
Glass Type:	VH (Ozone)	Coating:	A11-QC-001	
If Spliced:	L	mm	VH	mm
(Y)				



UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
33	240	12000	80.00%		REL-2P60-S



PO Box 191, 212 Ideal Way
Poultney, VT 05764 USA
Phone-(802) 287-4195 Fax-(802) 287-4489
www.firstlightusa.com
email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

UV Output is measured at 254 nm

**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

3/9/2012

10:05:59 AM