

Lamp Type: G64T5LCA/C


Spec Number:

1993

Engineering Specification Sheet


Lamp Diagram:

Single Pin Lamp

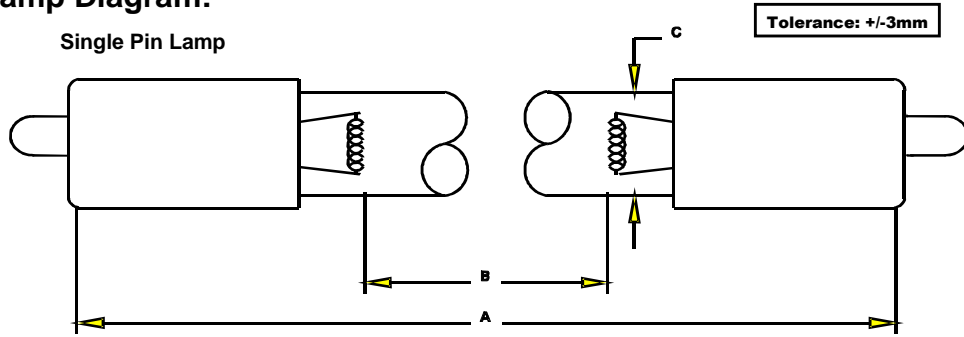

A08-60-CP0 HD Single Pin Base


Left Base Diagram:

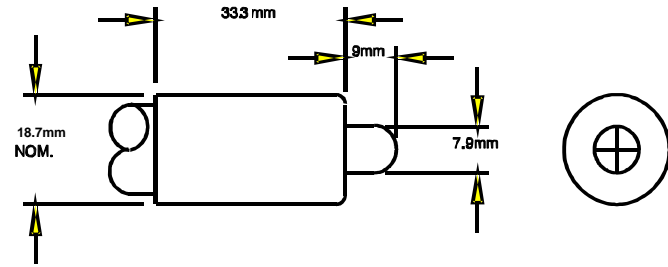

Pin: 08-PN-007

A08-60-CP0 HD Single Pin Base

Right Base Diagram:

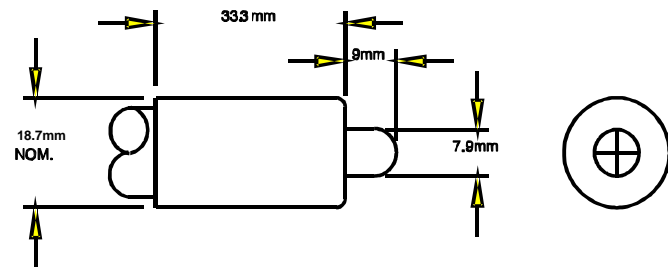

Pin: 08-PN-007

Lamp Characteristics

(A) Base Face:	1554	mm	Operating Current	450mA
(B) ARC:	1478	mm	Lamp Voltage:	170V
(C) Bulb Diameter:	15	mm	Lamp Wattage:	75W
(X)				
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001	
If Spliced:	L	mm	VH	mm
(Y)				



UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
33	240	12000	80.00%		REL-2P60-S

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

UV Output is measured at 254 nm

**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/16/2011

12:17:34 PM