
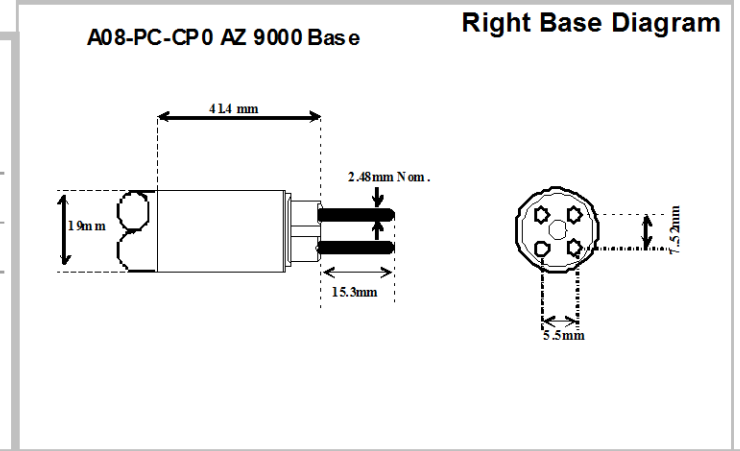
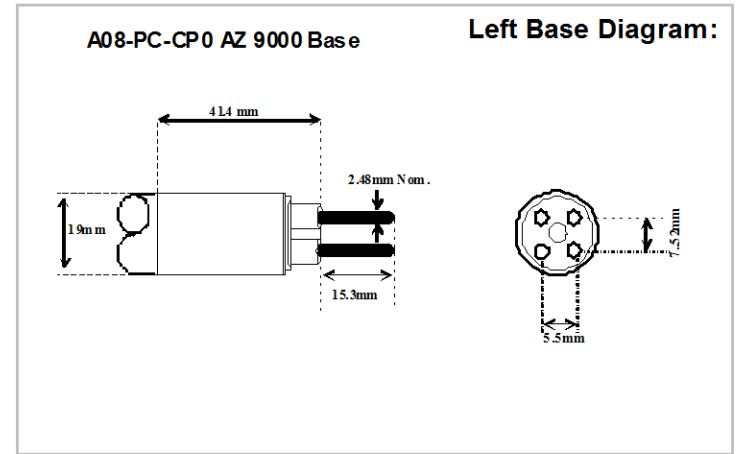


Lamp Type: **GSL1554T5VHCA/2S07/2CB-0PC**  
 Replaces AZ9000

Spec Number:  
**2147**

*Engineering Specification Sheet*

**Lamp Diagram:**

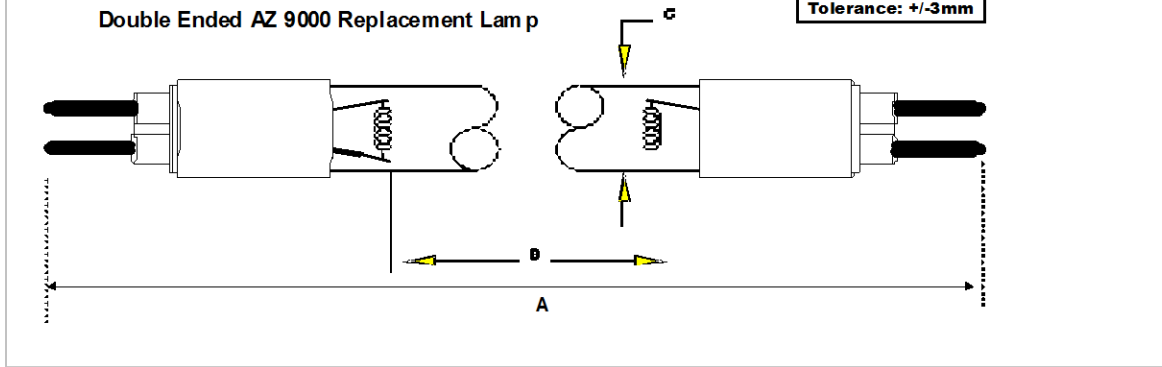

**Lamp Characteristics**

(A) Base Face:	1554 mm	+/- 3		
(B) ARC:	1483mm		Operating Current	800ma.
(C) Bulb Diameter	15		Lamp Voltage	170v
(X)			Lamp Wattage	130w
Glass Type:	VH (Ozone)	Coating	A11-QC-001	
<b>If Spliced:</b>	L	mm	VH	mm
	(Y)			



**UV Output**

Output UVC Watts	Output $\mu$ /cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
54	395	12000	80.00%		LCG800-240V



212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
 \*\*\*UV Output is measured at 254 nm\*\*\*  
 \*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

11/17/2014  
 3:29:38 PM