

Lamp Type: GSL1554T5VHSCA/2S07/2CB-0PCB

Spec Number:


2147

Engineering Specification Sheet

Lamp Diagram:


Double Ended AZ 9000 Replacement Lamp

Tolerance: +/-3mm

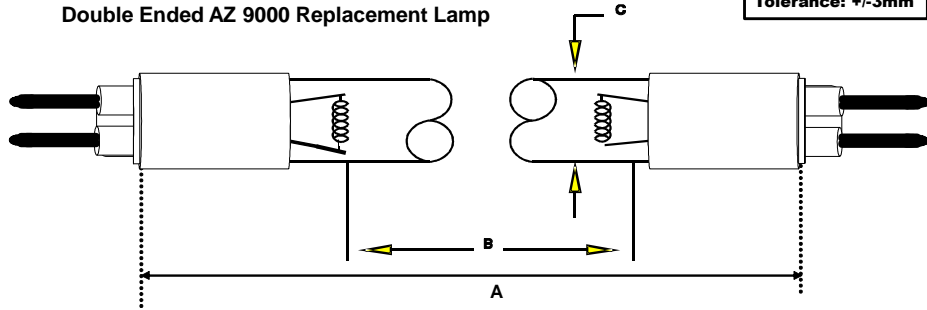


A08-PC-CP0 AZ 9000 Base

Left Base Diagram:

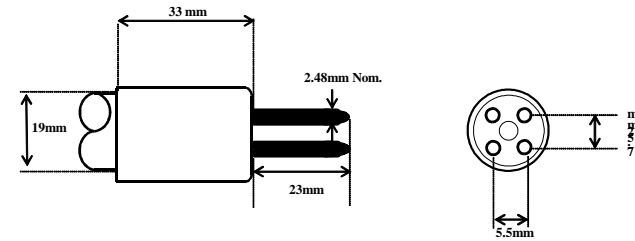

A08-PC-CP0 AZ 9000 Base

Right Base Diagram:

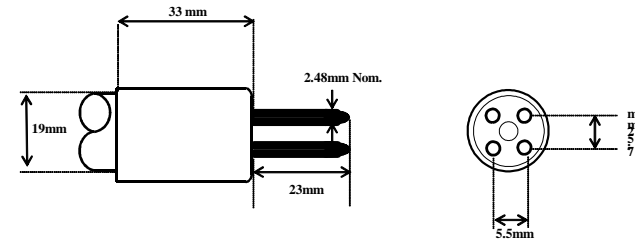

Lamp Characteristics

(A) Base Face:	1554	mm	+/- 3		
(B) ARC:	1483	mm		Operating Current	900ma.
(C) Bulb Diameter	15	mm		Lamp Voltage	170v
(X)				Lamp Wattage	153w
Glass Type:	Synthetic	Coating:	A11-QC-001		
If Spliced:	L	mm	VH	mm	
(Y)					

UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm^2 @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
54		425	12000	80.00%		Photoscience

First Light
 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

7/10/2018
 3:06:45 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.