


Lamp Type: G36T5VHCA/S07/CB-0J6
 Aquafine replacement P/N18063


Spec Number:
 2484

Engineering Specification Sheet

Lamp Diagram:

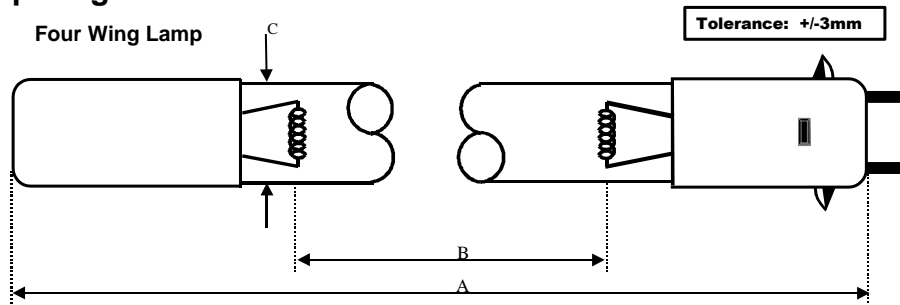


A08-93-C00 HD No Hole Base w/ Silver Blue Glaze Left Base Diagram:

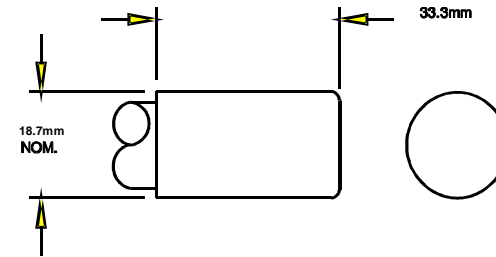

Right Base Diagram:

A08-J6-CP0 Four Wing Base

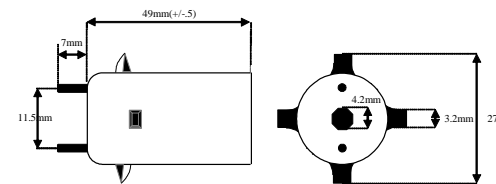

Lamp Characteristics

(A) Base Face:	856	mm	+ .76 / -3mm		
(B) ARC:	762	mm		Operating Current	420mA
(C) Bulb Diameter	15	mm		Lamp Voltage	120V
(X)				Lamp Wattage	40W
Glass Type:	VH (Ozone)	Coating:	A11-QC-001		
If Spliced:	L	mm	VH	mm	
(Y)					

UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
16		150	12000	80.00%		REI2G64G6MV

First Light
 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

7/3/2018
 12:02:04 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.