

Lamp Type: GPH1055T5.6LCA/HO/CB-0B8


Spec Number:

2510

Engineering Specification Sheet


Lamp Diagram:

18mm Lamp w/ B8 Base

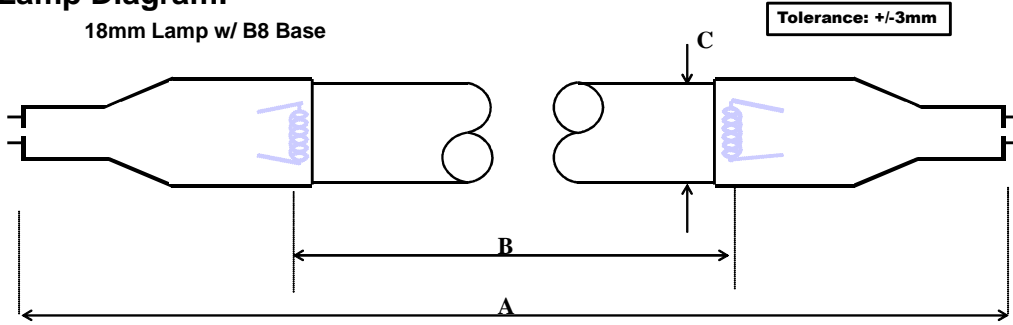

A08-B8-CP0 Ceramic Base


(REVISED 5/19/08)

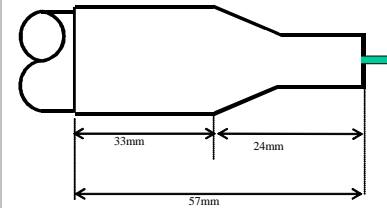

Material: Alumina

Pin: 08-PN-006

Left Base Diagram:




14.3mm 18mm 21.2mm*
*Cannot Ex
21.5mm

Lamp Characteristics

(A) Base Face:	1055	mm	+/- 3mm		
(B) ARC:	953	mm		Operating Current	725ma.
(C) Bulb Diameter	17.5	mm		Lamp Voltage	90v
(X)				Lamp Wattage	65w
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001		
If Spliced:	L	mm	VH	mm	
	(Y)				

A08-B8-CP0 Ceramic Base


(REVISED 5/19/08)

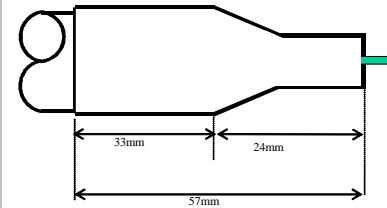

Material: Alumina

Pin: 08-PN-006

Right Base Diagram:



14.3mm 18mm 21.2mm*
*Cannot Ex
21.5mm

UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm^2 @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
23		225	12000	80.00%		PSP2GPH40HO

First Light
 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

7/10/2018
 3:05:57 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.