

Lamp Type: G36T5LCA/C


Spec Number:

2525

Engineering Specification Sheet


Lamp Diagram:

Single Pin Lamp

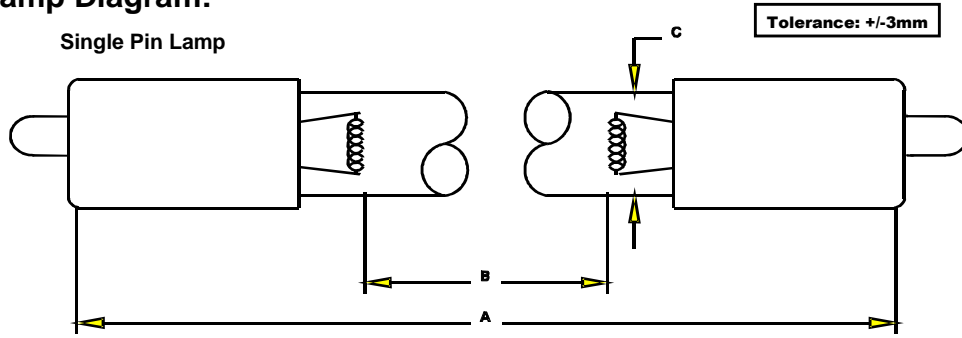

A08-60-CP0 HD Single Pin Base


Left Base Diagram:

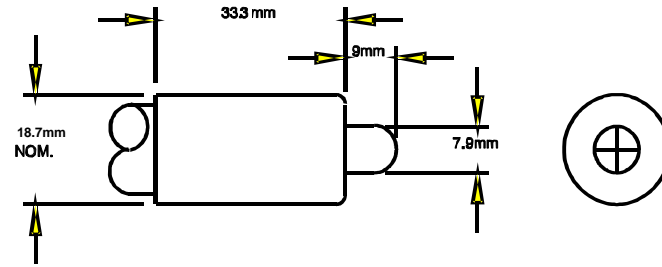

Pin: 08-PN-007

A08-60-CP0 HD Single Pin Base

Right Base Diagram:

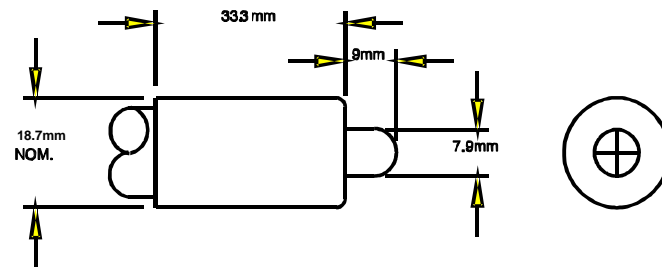

Pin: 08-PN-007

Lamp Characteristics

(A) Base Face:	843	mm		
(B) ARC:	767	mm	Operating Current	420mA
(C) Bulb Diameter:	15	mm	Lamp Voltage:	120V
(X)			Lamp Wattage:	40W
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001	
If Spliced:	L	mm	VH	mm
(Y)				



UV Output

Output UVC Watts	Output $\mu$ /cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
16	150	12000	80.00%		SM-140-TP

**First Light**  
 PO Box 191, 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

\*\*\*UV Output is measured at 254 nm\*\*\*

\*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/10/2011

2:49:57 PM