


Lamp Type: GIA1598T6LCA/HO/4C
DB-300

Spec Number:
2850


Engineering Specification Sheet

Lamp Diagram:
DB350 Lamp

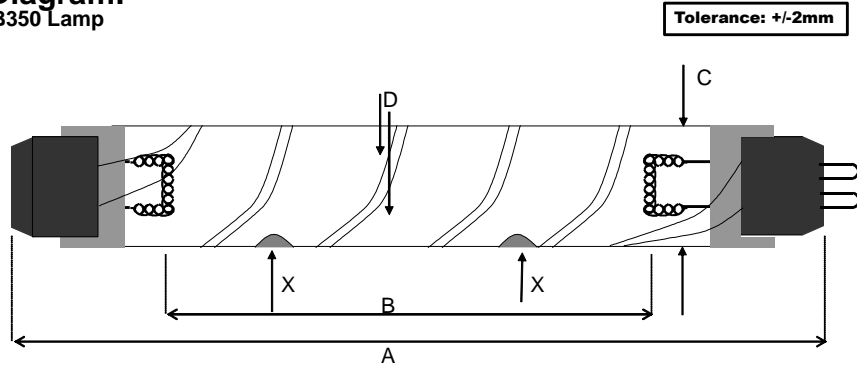


A208-35-C00 19mm No Hole Base

Left Base Diagram:

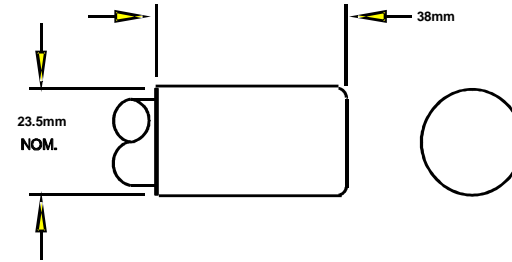

A208-36-CP0 19mm Four Pin Base

Right Base Diagram:

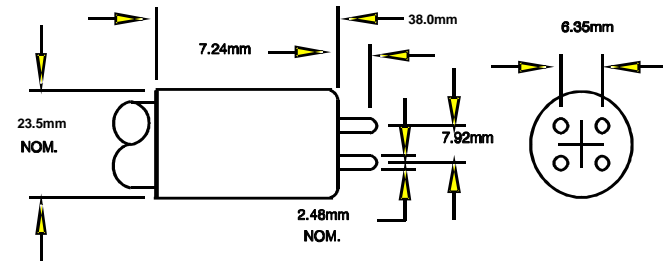

Pin: 08-PN-006

Lamp Characteristics

(A) Base Face:	1598 mm	+/- 2mm		
(B) ARC:	1475mm	+/- 5mm	Operating Current	1.8a
(C) Bulb Diameter	19		Lamp Voltage	134v
(X) Amalgam			Lamp Wattage	240w
Glass Type:	L (Non Ozone)	Coating:	A11-QC-001	
If Spliced:	L	mm	VH	mm
(Y)				

UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
95		750	12000	80.00%		03-EB-237

First Light
212 Ideal Way
Poultney, VT 05764 USA
Phone-(802) 287-4195 Fax-(802) 287-4489
www.firstlightusa.com
email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
UV Output is measured at 254 nm
**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

7/10/2018
3:00:36 PM