



Lamp Type: GPH389T5LCA/HO/VB-032
 Model C&D

Spec Number:
 2909

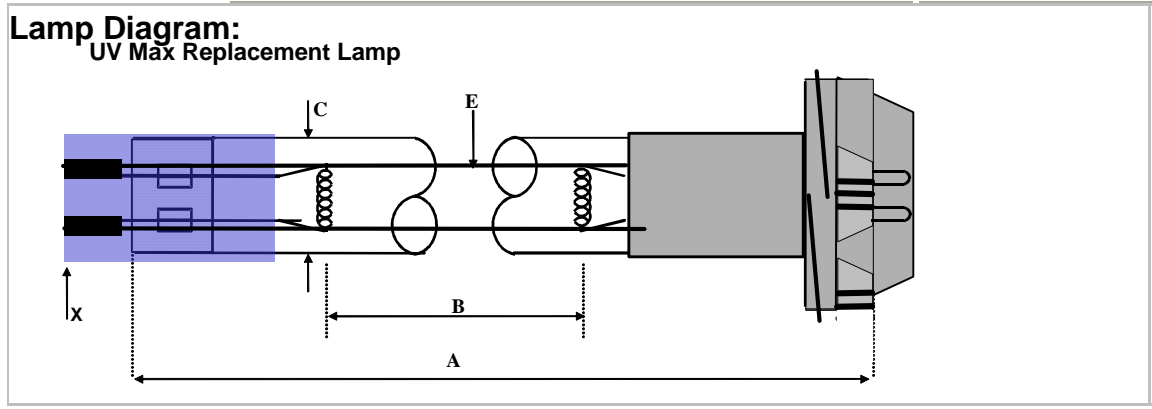

Lamp Characteristics

(A) Base Face:	389	mm		
(B) ARC:	308	mm	Operating Current	863mA
(C) Bulb Diameter:	15	mm	Lamp Voltage:	46.5V
(X)		mm	Lamp Wattage:	40W
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001	
If Spliced:	L	mm	VH	mm
	(Y)	mm		

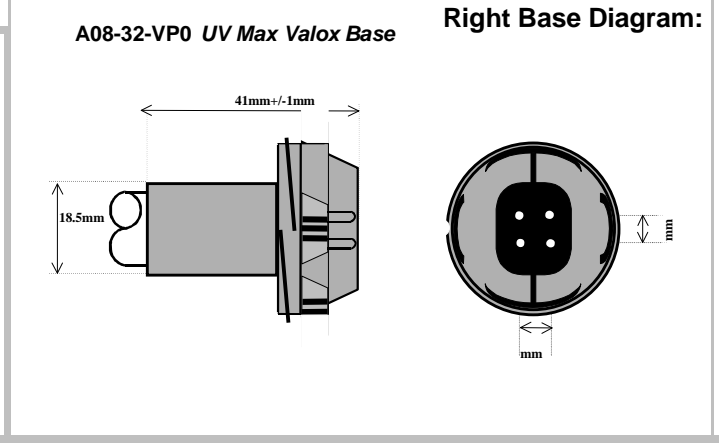

UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
15	135	12000	80.00%		PSP2GPH40HO

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/20/2011
 1:43:26 PM