
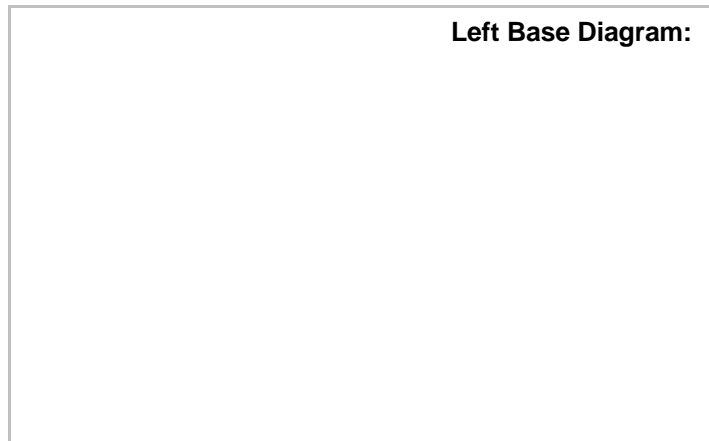



Lamp Type: GPH226T5LCA/HO/VB-032
 Model B

Spec Number:
 2955

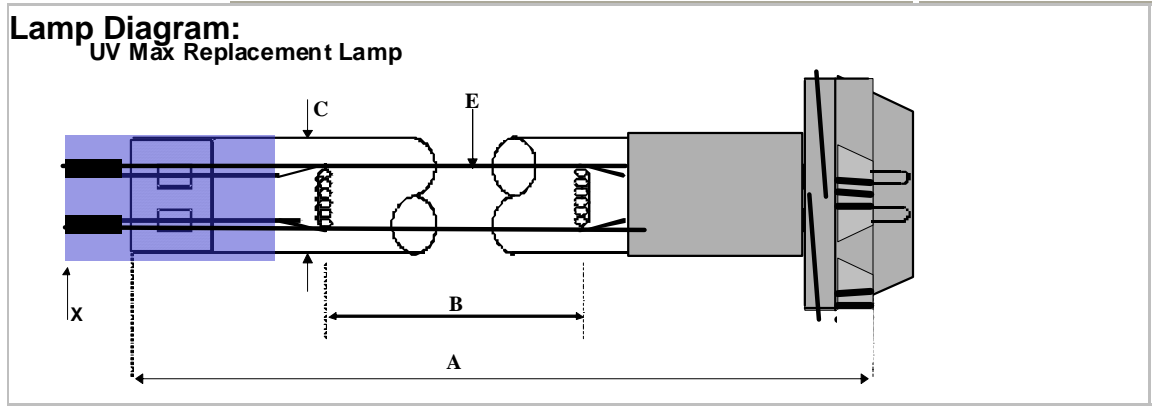

Lamp Characteristics

(A) Base Face:	226 mm	+/- 3mm	Operating Current	850mA
(B) ARC:	164mm		Lamp Voltage:	26V
(C) Bulb Diameter:	15		Lamp Wattage:	22W
(X) See G3				
Glass Type:	L (Non-Ozone)	Coating:		
If Spliced:	L	mm	VH	mm
	(Y)			

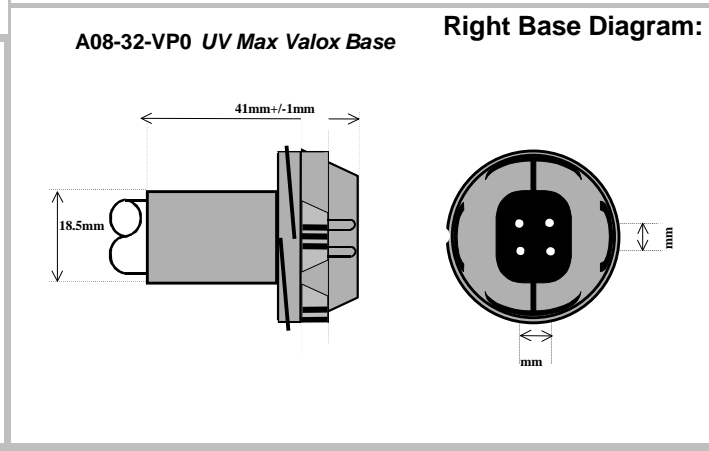

UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
8	70	12000	80.00%		PSP2GPH40HO

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/20/2011
 1:43:13 PM