


Lamp Type: GPH910T5LCA/CB-0M1/Cell

Spec Number:

Engineering Specification Sheet

2990


Lamp Diagram:
Cell Lamp-2

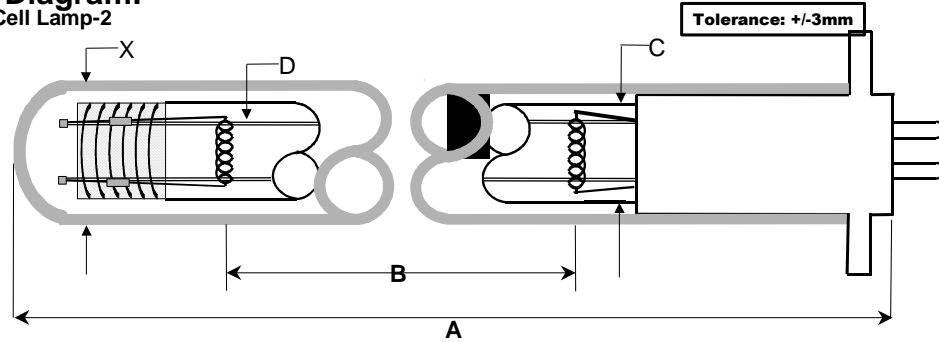

Left Base Diagram:

Right Base Diagram:

A08-M1-CP0 Step Base with Plug Guide

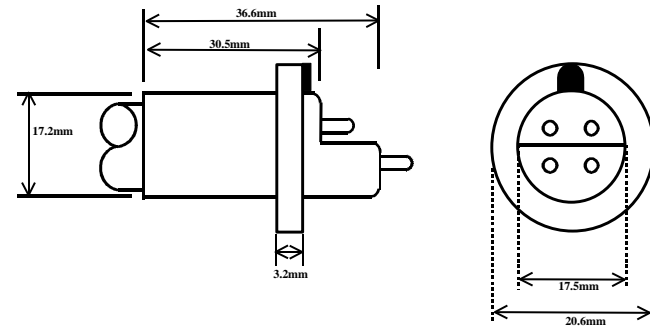

Lamp Characteristics

(A) Base Face:	910	mm	+/- 3		
(B) ARC:	824	mm		Operating Current	420mA
(C) Bulb Diameter	15	mm		Lamp Voltage	125V
(X) Quartz Sleeve				Lamp Wattage	52W
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001		
If Spliced:	L	mm	VH	mm	
	(Y)				

UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
17		165	12000	80.00%		PSK2GPH18MV

First Light
212 Ideal Way
Poultney, VT 05764 USA
Phone-(802) 287-4195 Fax-(802) 287-4489
www.firstlightusa.com
email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
UV Output is measured at 254 nm
**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

7/3/2018
11:44:09 AM