

Lamp Type: GIA1512T9VHCA/HO/CB-024
XLR-30IQ


Spec Number:

3115

Engineering Specification Sheet

Lamp Diagram:
Wedeco 32143/4P

Tolerance: +/-3mm

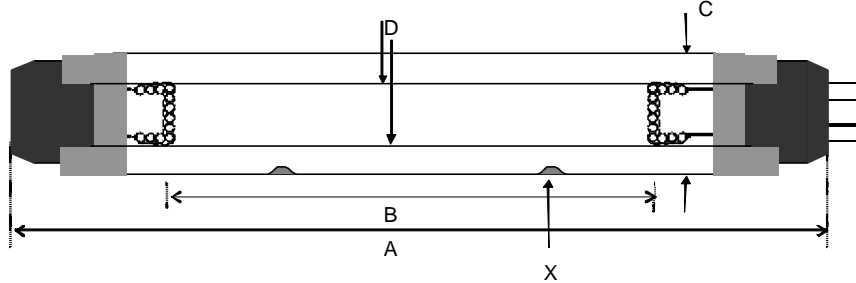


Lamp Characteristics


(A) Base Face: 1512 mm
 (B) ARC: 1435mm
 (C) Bulb Diameter: 28
 (X) Amalgam
 Glass Type: VH (Ozone) Coating: A11-QC-001
 Operating Current: 3.5a
 Lamp Voltage: 95v
 Lamp Wattage: 330w
 If Spliced: L _____ mm VH _____ mm
 (Y) _____ mm




Left Base Diagram:
A208-12-C00 Four Pin Base White w/o Pins




Material: Aluminum - White



Right Base Diagram:
A208-24-CP0 XLR-30 Base White



Pin: _____



UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
140	750	12000	80.00%		

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/16/2011
12:44:21 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.