


Lamp Type: GSL1554T5VHCA/2CB-0M9  
(7660W)


Spec Number:  
3128

Lamp Diagram:

Barrier Base Lamp

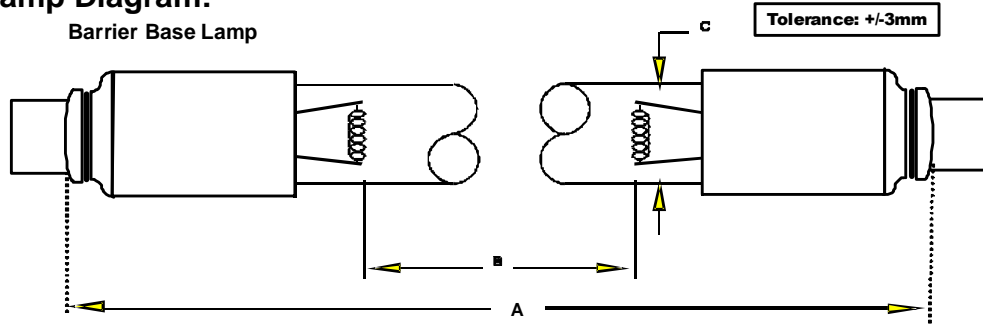


Left Base Diagram:  
A08-M9-CP0 Aftermarket Photoscience Base

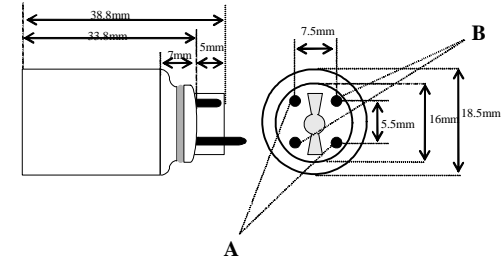

A: 08-PN-006 (Short)  
B: 08-PN-010 (Long)

Right Base Diagram:  
A08-M9-CP0 Aftermarket Photoscience Base

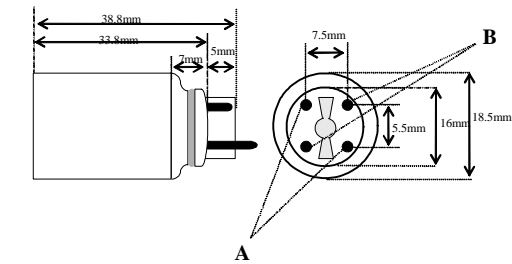

A: 08-PN-006 (Short)  
B: 08-PN-010 (Long)

Lamp Characteristics

(A) Base Face: 1554 mm +/- 3mm  
 (B) ARC: 1481 +/- 3mm  
 (C) Bulb Diameter: 15  
 (X) \_\_\_\_\_  
 Glass Type: VH (Ozone) Coating: A11-QC-001  
 If Spliced: L \_\_\_\_\_ mm VH \_\_\_\_\_ mm  
 (Y) \_\_\_\_\_

Operating Current: 450mA  
 Lamp Voltage: 170V  
 Lamp Wattage: 75W



UV Output

Output UVC Watts	Output $\mu$ /cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
33	240	12000	80.00%		REL-2P60-S

**First Light**  
 PO Box 191, 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
 \*\*\*UV Output is measured at 254 nm\*\*\*  
 \*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

3/9/2012  
10:06:24 AM