


Lamp Type: GSL1554T5VHCA/2S07/CB-0M9  
7260WSA Solderlong pins

Spec Number:  
3190

Engineering Specification Sheet


Lamp Diagram:

Barrier Base Lamp Single Ended

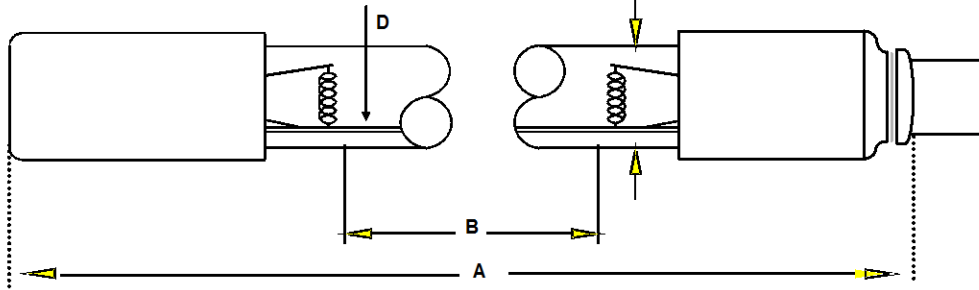

A08-62-C00 HD No Hole Base

Left Base Diagram:

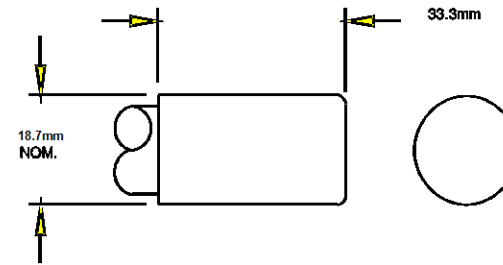


Lamp Characteristics

(A) Base Face: 1554 mm  
 (B) ARC: 1478mm  
 (C) Bulb Diameter 15  
 (X) \_\_\_\_\_  
 Glass Type: VH (Ozone) Coating A11-QC-001  
 Operating Current 800mA  
 Lamp Voltage 170v  
 Lamp Wattage 130w  
 If Spliced: L \_\_\_\_\_ mm VH \_\_\_\_\_ mm  
 (Y) \_\_\_\_\_



Right Base Diagram

A08-M9-CP0 Aftermarket Photoscience Base

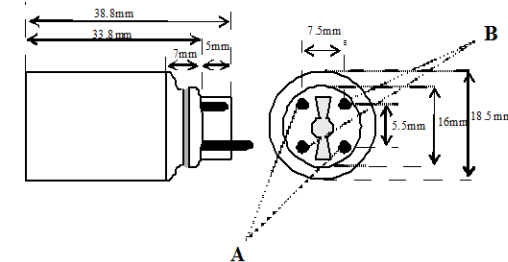

A: 08-PN-006 (Short)  
B: 08-PN-010 (Long)

UV Output

Output UVC Watts	Output $\mu$ /cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
54	395	12000	80.00%		LCG800



PO Box 191, 212 Ideal Way  
Poultney, VT 05764 USA  
Phone-(802) 287-4195 Fax-(802) 287-4489  
www.firstlightusa.com  
email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

3/6/2014

\*\*\*UV Output is measured at 254 nm\*\*\*

12:03:13 PM

\*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.