

Lamp Type: GSL1554T5VHSCA/2S07/2CB-0M9


Spec Number:

3211


Engineering Specification Sheet

Lamp Diagram:

Barrier Base Lamp

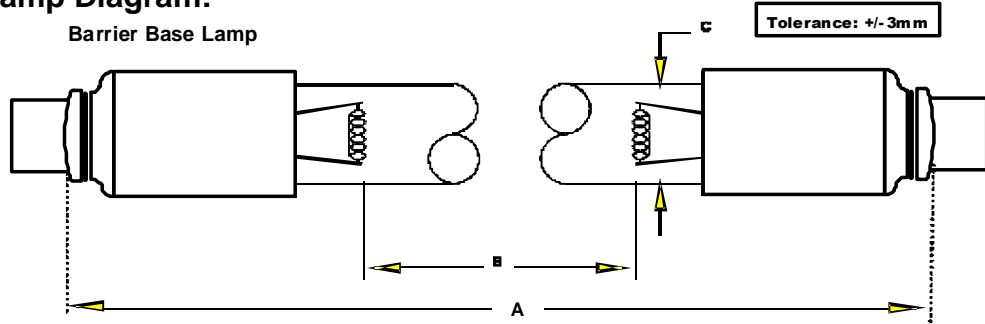


Left Base Diagram:
A08-M9-CP0 Aftermarket Photoscience Base

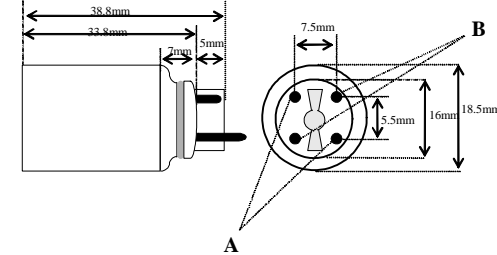

A: 08-PN-006 (Short)
B: 08-PN-010 (Long)

Right Base Diagram:

A08-M9-CP0 Aftermarket Photoscience Base

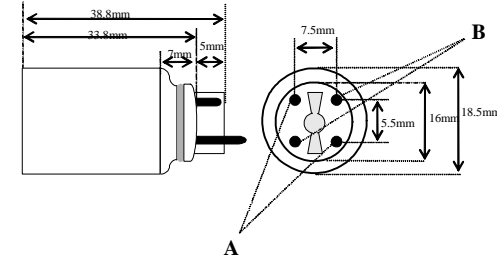

A: 08-PN-006 (Short)
B: 08-PN-010 (Long)

Lamp Characteristics

(A) Base Face: 1554 mm
 (B) ARC: 1478mm
 (C) Bulb Diameter: 15
 (X) _____
 Glass Type: Synthetic Coating: A11-QC-001
 Operating Current: 800ma.
 Lamp Voltage: 170v
 Lamp Wattage: 130w
 If Spliced: L _____ mm VH _____ mm
 (Y) _____



UV Output

| Output UVC Watts | Output μ /cm ² @ 1 Meter | Rated Life (hrs) | % Output @EOL | Output Notes Field | Ballast Used for Measurements |
|------------------|---|------------------|---------------|--------------------|-------------------------------|
| 54 | 395 | 12000 | 80.00% | | LCG800 |

First Light
 PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

3/9/2012
 10:07:44 AM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.