
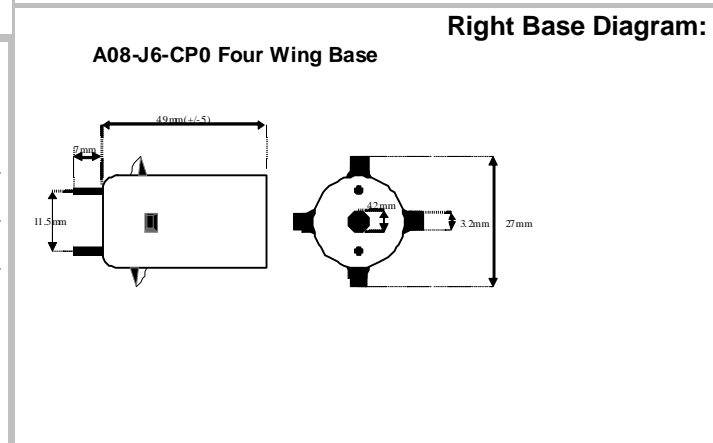
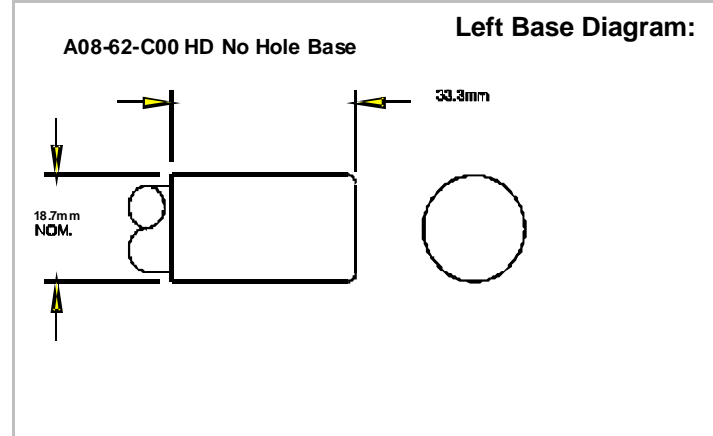


Lamp Type: G36T5LCA/S07/CB-0J6
Aquafine P/N 18059

Spec Number:
3883

Engineering Specification Sheet

Lamp Diagram:

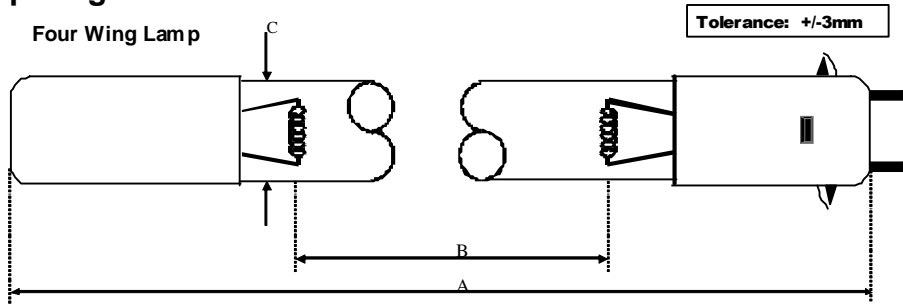

Lamp Characteristics

(A) Base Face: 856 mm +/- 3

(B) ARC: 762

(C) Bulb Diameter: 15

(X) _____

Glass Type: L (Non Ozone) Coating: A11-QC-001

If Spliced: L _____ mm VH _____ mm

(Y) _____

Operating Current: 420ma.

Lamp Voltage: 100v

Lamp Wattage: 40w



UV Output

| Output UVC Watts | Output μ /cm ² @ 1 Meter | Rated Life (hrs) | % Output @EOL | Output Notes Field | Ballast Used for Measurements |
|------------------|---|------------------|---------------|--------------------|-------------------------------|
| 16 | 150 | 12000 | 80.00% | | SM140-S-TP |

First Light
PO Box 191, 212 Ideal Way
Poultney, VT 05764 USA
Phone-(802) 287-4195 Fax-(802) 287-4489
www.firstlightusa.com
email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
UV Output is measured at 254 nm
**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

2/14/2013
12:16:21 PM