
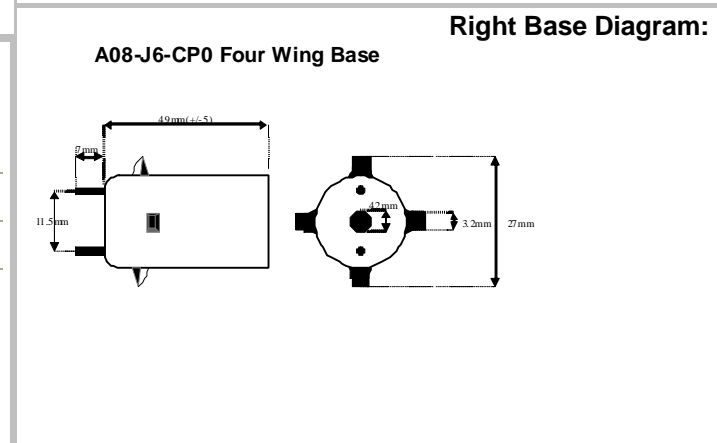
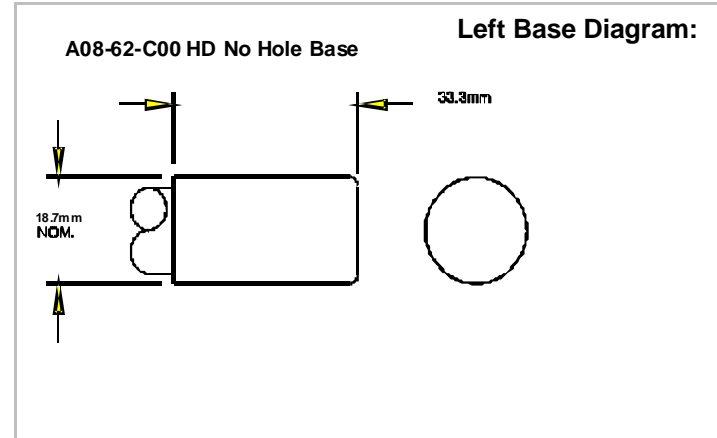


Lamp Type: G36T5VHCA/S07/CB-0J6  
 Aquafine P/N 18062

Spec Number:  
 3884

Engineering Specification Sheet

**Lamp Diagram:**

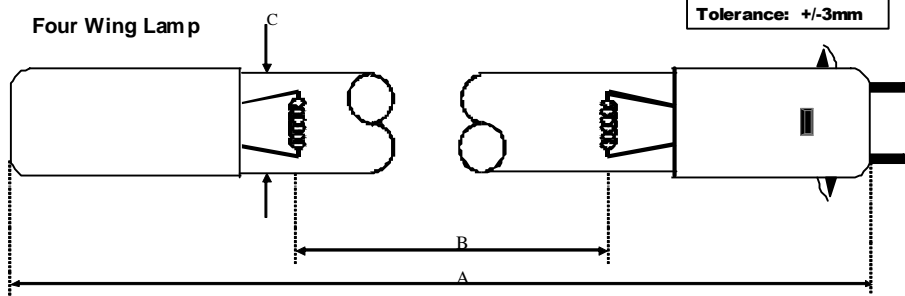

**Lamp Characteristics**

(A) Base Face: 856 mm +/- 3  
 (B) ARC: 762  
 (C) Bulb Diameter: 15  
 (X) \_\_\_\_\_  
 Glass Type: VH (Ozone) Coating: A11-QC-001  
 If Spliced: L \_\_\_\_\_ mm VH \_\_\_\_\_ mm  
 (Y) \_\_\_\_\_

Operating Current: 420ma.  
 Lamp Voltage: 100v  
 Lamp Wattage: 40w



**UV Output**

| Output UVC Watts | Output $\mu$ /cm <sup>2</sup> @ 1 Meter | Rated Life (hrs) | % Output @EOL | Output Notes Field | Ballast Used for Measurements |
|------------------|---|------------------|---------------|--------------------|-------------------------------|
| 16               | 150                                     | 12000            | 80.00%        |                    | SM140-S-TP                    |

**First Light**  
 PO Box 191, 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
 \*\*\*UV Output is measured at 254 nm\*\*\*  
 \*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

2/14/2013  
 12:16:39 PM