

Lamp Type: GPH330T5LCA/CB-098


Spec Number:

Engineering Specification Sheet

3933


Lamp Diagram:

R-Can Lamp with 098 base

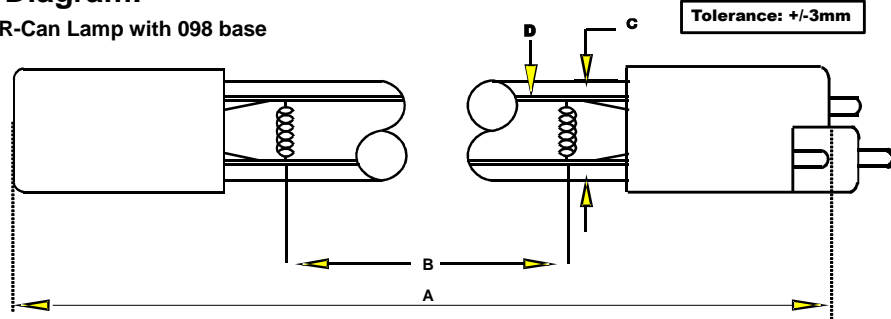


A08-PP-C00 HD No Hole Base Black

Left Base Diagram:

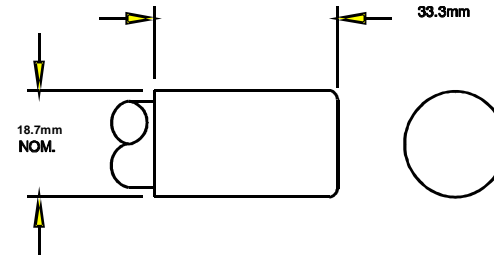

Right Base Diagram:

08-CB-098 R-Can Base  
08-PC-098 R-Can Base with Vendor Supplied Pin

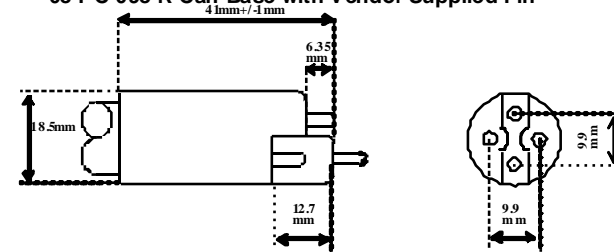

Pin: 08-PN-006

Lamp Characteristics

(A) Base Face:	330 mm	+/- 3mm		
(B) ARC:	254mm		Operating Current	336mA
(C) Bulb Diameter	15		Lamp Voltage	50V
(X)			Lamp Wattage	15W
Glass Type:	L (Non Ozone)	Coating:	A11-QC-001	
<b>If Spliced:</b>	L	mm	VH	mm
(Y)				



UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
5		50	12000	80.00%		GPH20120

**First Light**  
212 Ideal Way  
Poultney, VT 05764 USA  
Phone-(802) 287-4195 Fax-(802) 287-4489  
www.firstlightusa.com  
email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
\*\*\*UV Output is measured at 254 nm\*\*\*  
\*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

7/10/2018  
3:59:51 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.