


Lamp Type: GPH410T5LCA/HO/MBP/C

Spec Number:


Engineering Specification Sheet

3970


Lamp Diagram:

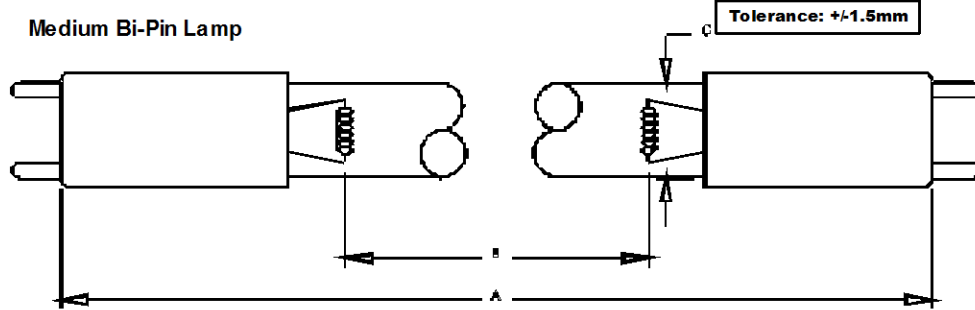

A08-74-CP0 HD Medium Bi-Pin Base Left Base Diagram:

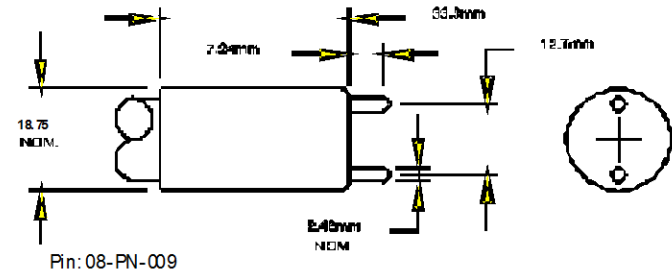

A08-74-CP0 HD Medium Bi-Pin Base Right Base Diagram

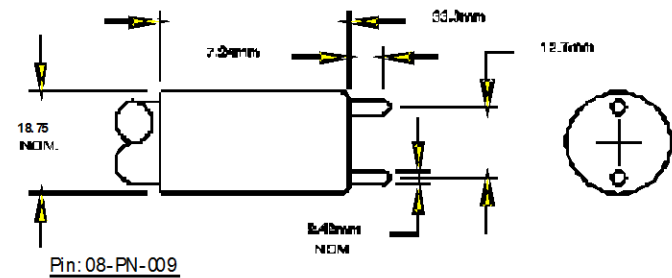

Lamp Characteristics

(A) Base Face:	410	mm	+/- 1.5		
(B) ARC:	334			Operating Current	800ma.
(C) Bulb Diameter	15			Lamp Voltage	50v
(X)				Lamp Wattage	40w
Glass Type:	L (Non Ozone)	Coating	A11-QC-001		
If Spliced:	L	mm	VH	mm	
	(Y)				

First Light

UV Output

Output UVC Watts	Output $\mu$ /cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
13	110	12000	80.00%		PSP2GPH40HO



PO Box 191, 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

3/3/2014

\*\*\*UV Output is measured at 254 nm\*\*\*

9:41:44 AM

\*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.