


Lamp Type: GPH874T5LCA/HO/MBP/C

Spec Number:


3973

Engineering Specification Sheet


Lamp Diagram:

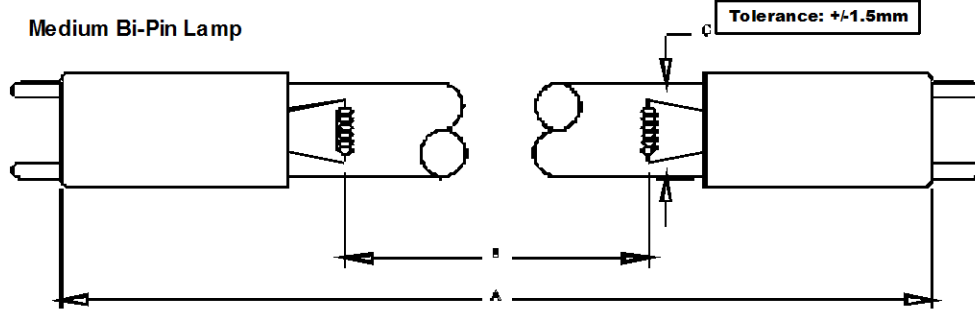

A08-74-CP0 HD Medium Bi-Pin Base Left Base Diagram:

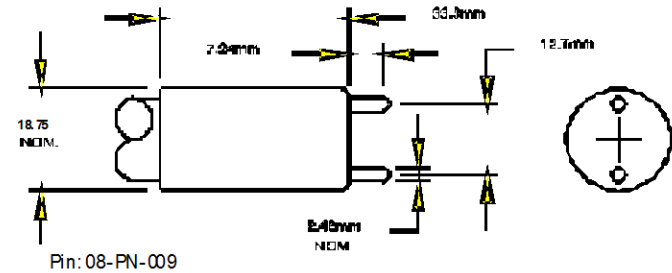

A08-74-CP0 HD Medium Bi-Pin Base Right Base Diagram

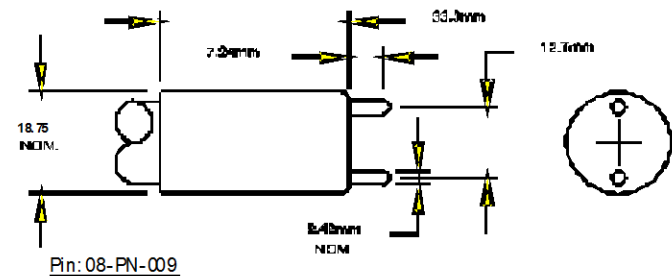

Lamp Characteristics

(A) Base Face:	874	mm	+/- 1.5		
(B) ARC:	803			Operating Current	800ma.
(C) Bulb Diameter	15			Lamp Voltage	100v
(X)				Lamp Wattage	80w
Glass Type:	L (Non Ozone)	Coating	A11-QC-001		
If Spliced:	L	mm	VH	mm	
	(Y)				

First Light

UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
28	265	12000	80.00%		PSP2GPH40HO



PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

3/3/2014

UV Output is measured at 254 nm

9:51:13 AM

**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.