


Lamp Type: GPH1534T5LCA/HO/MBP/C

Spec Number:

Engineering Specification Sheet

3975

Lamp Diagram:

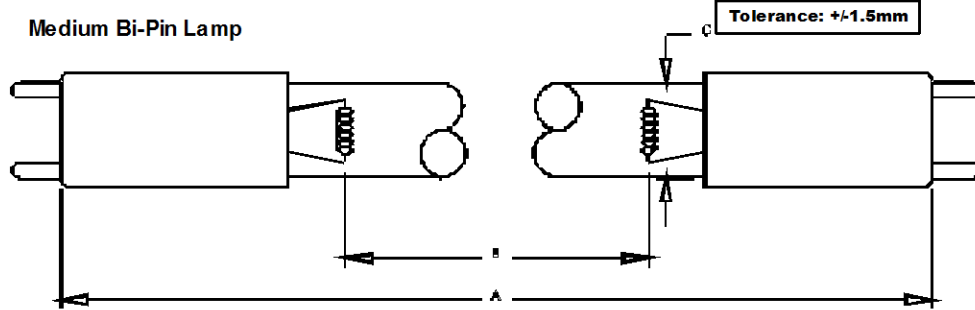


Lamp Characteristics


(A) Base Face:	1534	mm	+/- 1.5		
(B) ARC:	1458			Operating Current	800ma.
(C) Bulb Diameter	15			Lamp Voltage	170v
(X)				Lamp Wattage	130w
Glass Type:	L (Non Ozone)	Coating	A11-QC-001		
If Spliced:	L	mm	VH	mm	
	(Y)				

First Light

A08-74-CP0 HD Medium Bi-Pin Base Left Base Diagram:

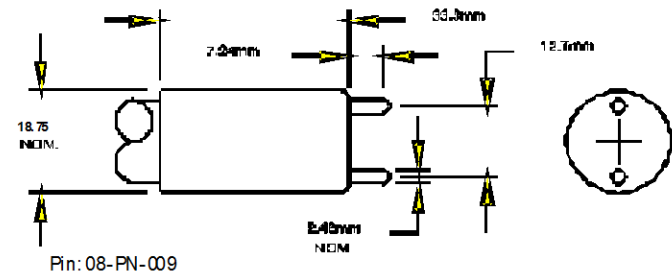

A08-74-CP0 HD Medium Bi-Pin Base Right Base Diagram

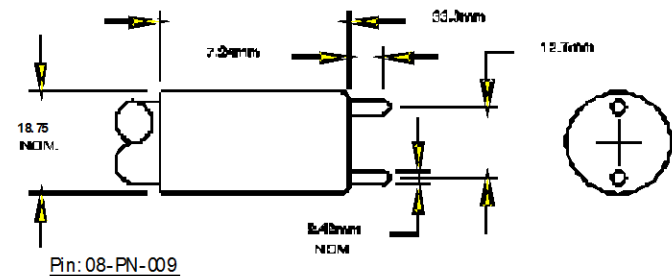

UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
50	370	12000	80.00%		LCG800-240V



PO Box 191, 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.

3/3/2014

UV Output is measured at 254 nm

9:52:20 AM

**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.