


Lamp Type: GPH865T5LCA/W
Replaces NLR 1579W

Spec Number:
3991

Engineering Specification Sheet

Lamp Diagram:

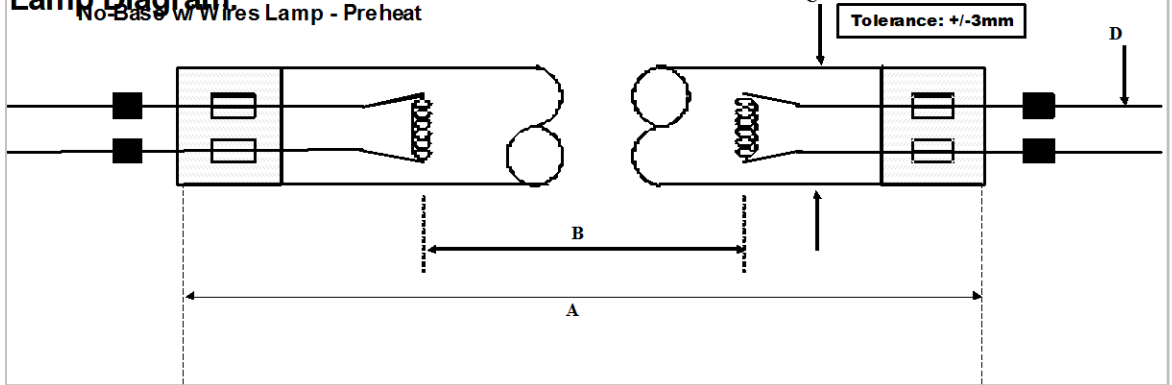

Left Base Diagram:

Right Base Diagram:

Lamp Characteristics

(A) Base Face: 865 mm +/- 3mm

(B) ARC: 805 Operating Current: 400ma.

(C) Bulb Diameter: 15 Lamp Voltage: 95v

(X) _____ Lamp Wattage: 38w

Glass Type: L (Non Ozone) Coating: A11-QC-001

If Spliced: L _____ mm VH _____ mm

(Y) _____



UV Output

Output UVC Watts	Output μ /cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
14	130	12000	80.00%		PSK2GPH18MV



PO Box 191, 212 Ideal Way
Poultney, VT 05764 USA
Phone-(802) 287-4195 Fax-(802) 287-4489
www.firstlightusa.com
email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions.

These values are subject to wide variations under application/field conditions.

3/9/2014

UV Output is measured at 254 nm

11:06:39 AM

**Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.