


Lamp Type: HT610/22/3.2

Spec Number:
H004

Engineering Specification Sheet

Lamp Diagram:

HID Lamp with Frame

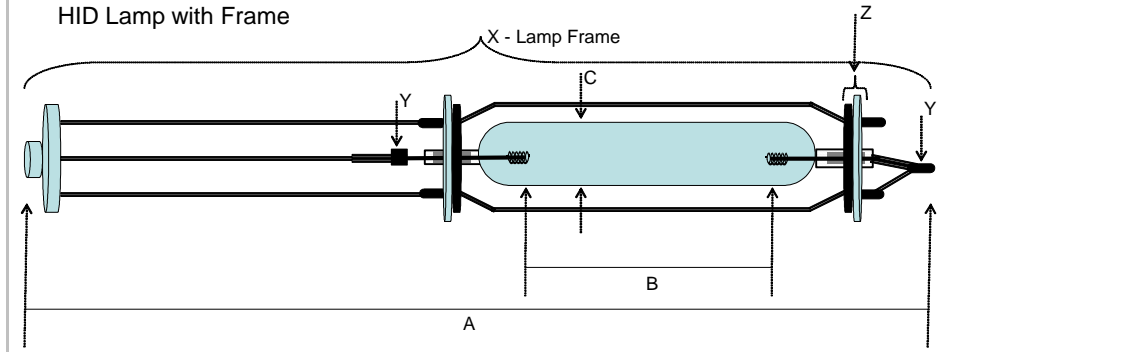

Left Base Diagram:

Right Base Diagram:

Lamp Characteristics

(A) Base Face:	645	mm	+/- 3		
(B) ARC:	240			Operating Current	8a
(C) Bulb Diameter	22			Lamp Voltage	400v
(X) Frame Assembly				Lamp Wattage	3200w
Glass Type:	VH (Ozone)	Coating:			
			HID Lamp with Frame		
If Spliced:	L	mm	VH	mm	
(Y) Parallel Splice					

UV Output - Certified to be true. Kenneth A. Ell, President

Output UVC Watts	micro/watt	/cm ² @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
300		3000	5000	50.00%		Nedap 3 kw

First Light
 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com
 email: sales@firstlightusa.com

*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.
 UV Output is measured at 254 nm
 **Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/15/2017
12:03:20 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.