

Lamp Type: HT711/22/3.2

Spec Number:


*Engineering Specification Sheet*

H005

Left Base Diagram:

**Lamp Diagram:**

HID Lamp with Frame

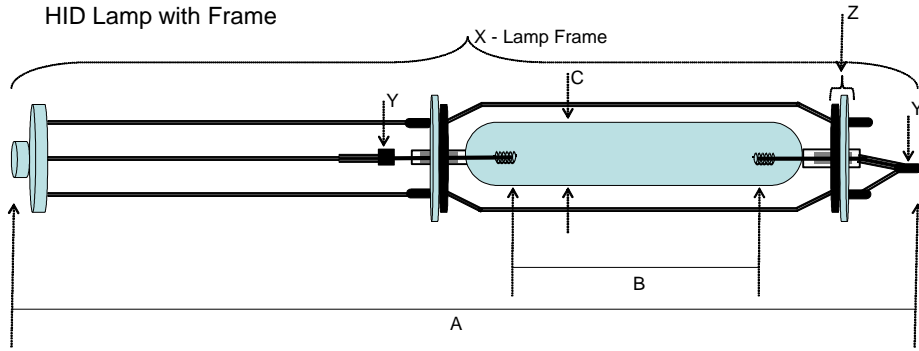

Right Base Diagram:

**Lamp Characteristics**

(A) Base Face:	725	mm		
(B) ARC:	240		Operating Current	8a
(C) Bulb Diameter	22		Lamp Voltage	400v
(X) Frame			Lamp Wattage	3.2kw
Glass Type:	VH (Ozone)	Coating:		
		HID Lamp with Frame		
<b>If Spliced:</b>	L	mm	VH	mm
(Y) Crimp				

**UV Output - Certified to be true. Kenneth A. Ell, President**

Output UVC Watts	micro/watt	/cm <sup>2</sup> @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
300		3000	5000	50.00%		Nedap 3 kw

**First Light**  
 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
 \*\*\*UV Output is measured at 254 nm\*\*\*  
 \*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

12/15/2017  
 12:03:37 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.