


Quartz Specification

Quartz Spec #: QZ514 Inactive

Quartz Type: 20x22.5x866mm dome

Sold As* _____

Quartz Sleeve
 Vessel part of a Cell Lamp

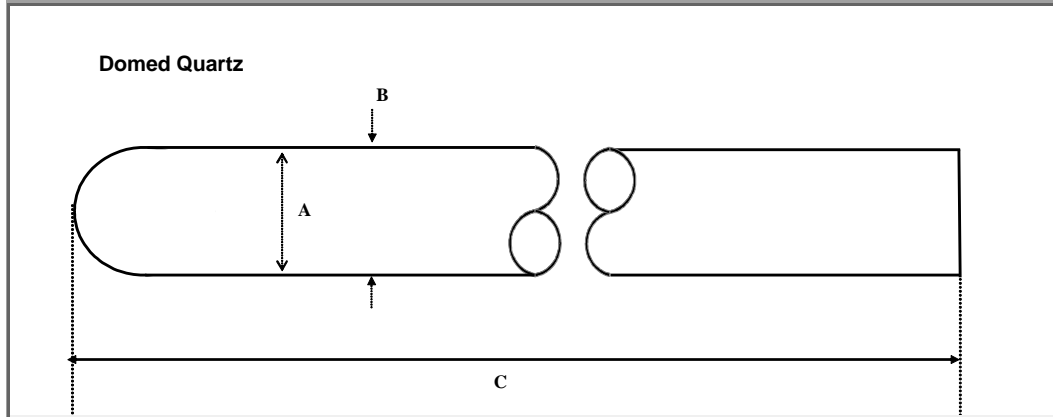

Quartz Type*: VH (Ozone)

Open Or Domed* _____

Open Both Ends Flat Dome
 Standard Dome Pressed Dome

Open End Polish Type: Standard

	(mm)	Tolerance
(A) ID*:	<u>20</u>	<u> </u>
(B) OD*:	<u>22.5</u>	<u>+/- .4</u>
(C) Length*:	<u>866</u>	<u>+/- 2mm</u>

Flared

	(mm)	Tolerance
(D1) Flare Diameter:	<u>0</u>	<u> </u>
(D2) Flare Diameter:	<u>0</u>	<u> </u>

(E) Ridge

	(mm)	Tolerance
(E) Ridge Width:	<u>0</u>	<u> </u>
(EX) Length Ridge to End:	<u>0</u>	<u> </u>
(EY) Ridge Diameter:	<u>0</u>	<u> </u>



First Light
 212 Ideal Way
 Poultney, VT 05764 USA
 Phone-(802) 287-4195 Fax-(802) 287-4489
 www.firstlightusa.com email: sales@firstlightusa.com

Date Last Updated: 4/25/2018
 Updated by: ke

5/2/2018
 11:11:44 AM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.